



GUTTER SYSTEMS



Proaqua

PVC



Flamingo

STEEL



Budmat.



RAINWATER GUTTER SYSTEMS



Excellent impermeability



Easy and quick assembly



Safe transport and storage



For home and industry



Peace of mind for years



Recommended by the roofers



Award-winning systems



High resistance to external factors



Only the best materials



Certificate
ISO 9001
Quality Management



Golden Medal MTP BUDMA 2015
for ProAqua PVC Gutter System



Golden Medal MTP BUDMA 2010
for the Flamingo Steel Gutter System



**POLSKIE
STOWARZYSZENIE
DEKARZY**

Recommendation of the Polish
Roofers Association



Patented solutions




RAIN? LET IT RAIN!

Budmat does not wait for the rain to stop. For us it is a great time to have fun – we put on sport shoes and bravely run for adventure.

It comes out easily because our homes are safe. They are protected by Budmat gutter systems that provide peace and comfort on rainy days. Get to know them.

These are ProAqua – PVC gutter system, Flamingo and Flamingo Magnelis – steel gutter systems.

Perfect for your home. Of course, if you do not live in the desert.

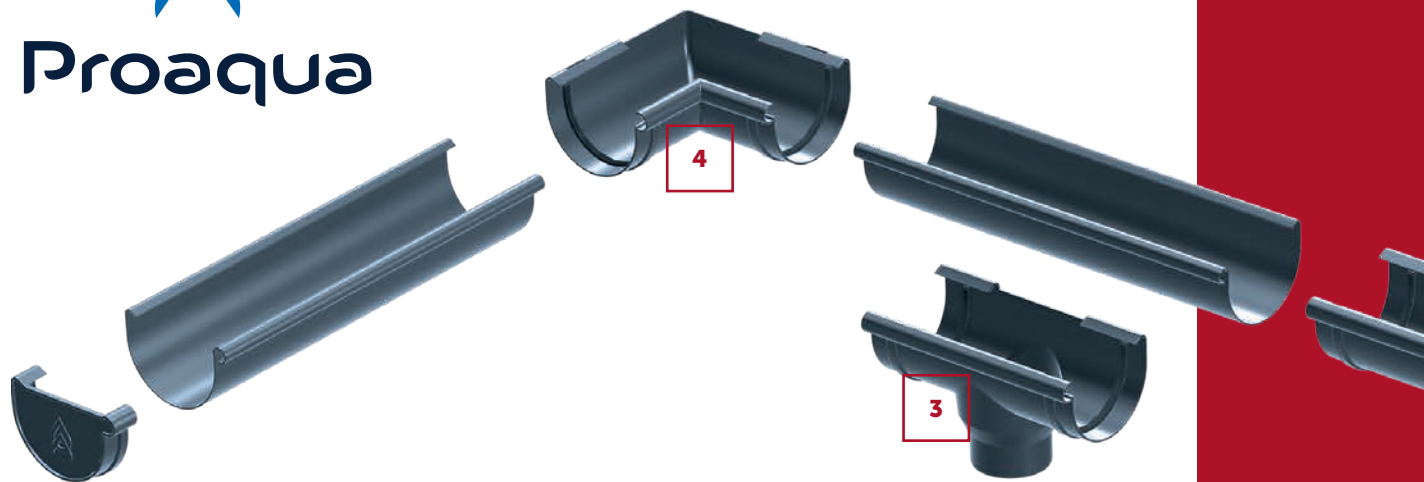

PVC SYSTEM ELEMENTS

- | | |
|----------------------|--|
| 75 – 100 – 125 – 150 | 1. Gutter (75 – 3m), (100-125-150 – 3m i 4m) |
| 75 – 100 – 125 – 150 | 2. Gutter joint with rubber seal |
| 75 – 100 – 125 – 150 | 3. Gutter outlet |
| 75 – 100 – 125 – 150 | 4. Internal gutter angle 90° |
| 75 – 100 – 125 – 150 | 5. External gutter angle 90° |
| 125 | 6. Adjustable external corner (120-145°) |
| 125 – 150 | 7. Rafter bracket |
| 75 – 100 – 125 – 150 | 8. Fascia bracket (with additional mounting hole) |
| 125 – 150 | 9. Fascia bracket |
| 75 – 100 – 125 – 150 | 10. Gutter stop end |
| 75 – 100 – 125 – 150 | 11. Downpipe (75 – 3m), (100-125-150 – 3m i 4m) |
| 100 – 125 – 150 | 12. Single-socket downpipe connector |
| 75 – 100 – 125 – 150 | 13. Double-socket downpipe connector |
| 75 – 100 – 125 – 150 | 14. Single-socket downpipe bend |
| 75 – 100 – 125 – 150 | 15. Double-socket downpipe bend |
| 75 – 100 – 125 – 150 | 16. Downpipe clip |
| 75 – 100 – 125 – 150 | 17. Downpipe clip fixing |
| 100 – 125 – 150 | 18. Steel downpipe clip |
| 75 – 100 – 125 – 150 | 19. Downpipe shoe |
| 75 – 100 – 125 – 150 | 20. Downpipe branch |
| 75 – 100 – 125 – 150 | 21. Debris/leaf interceptor gully
(the possibility of connecting a drain pipe 63, 80, 90, 100, 110) |



WAITING FOR THE RAIN TO FALL.



PVC

SYSTEMS

75/63

100/63

100/90

125/90

125/110

150/110

10
YEAR
WARRANTY

COLORS



Brown ~RAL 8017

75 – 100 – 125 – 150



Dark-brown ~RAL 8019

75 – 100 – 125 – 150



Graphite ~RAL 7016

75 – 100 – 125 – 150



Black ~RAL 9005

75 – 100 – 125 – 150



Brick-red ~RAL 8004

125 – 150



White ~RAL 9010


125 – 150

The colors shown are illustrative
and may vary from the actual ones.


DIMENSIONS ACCORDING TO SYSTEM SIZE

75
100
125
150


GUTTER

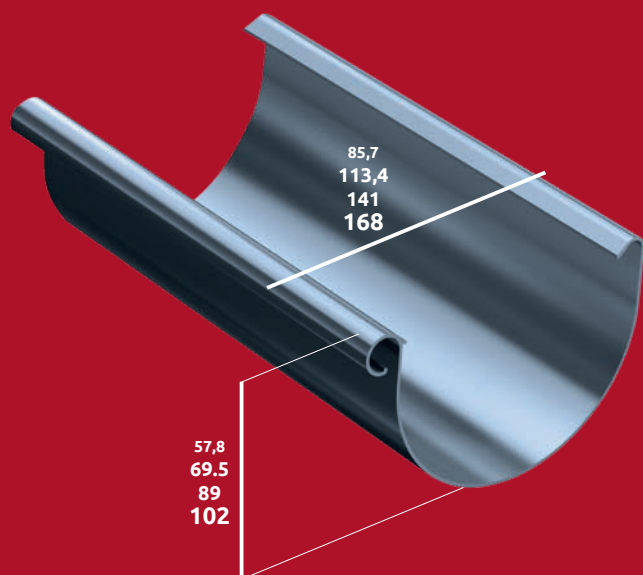


**GUTTER JOINT
WITH RUBBER SEAL**

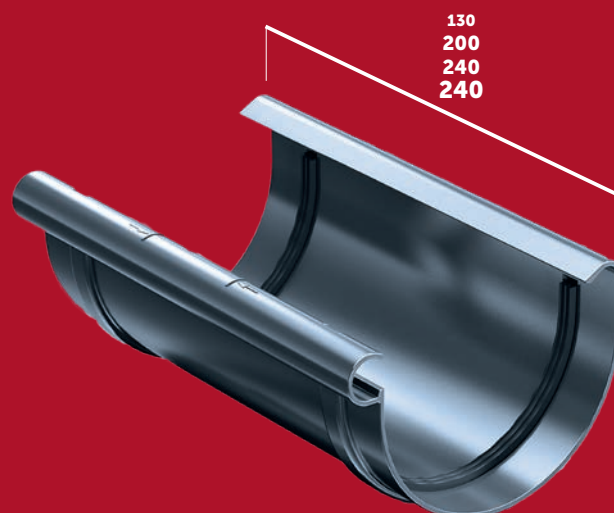


GUTTER OUTLET

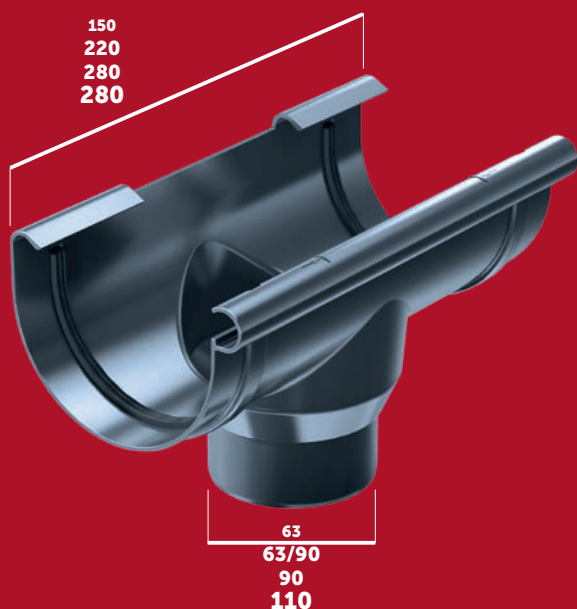


**EXTERNAL GUTTER ANGLE 90°
INTERNAL GUTTER ANGLE 90°**

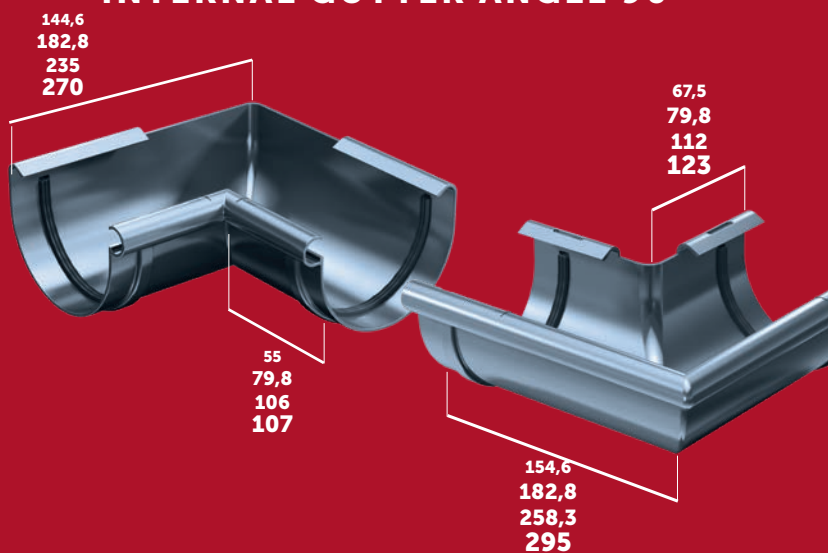

**ADJUSTABLE EXTERNAL CORNER
120-145°**

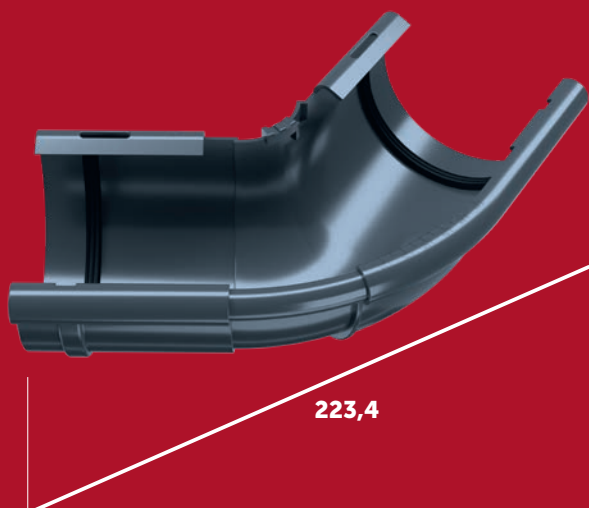

**FASCIA BRACKET
(WITH ADDITIONAL MOUNTING HOLE)**

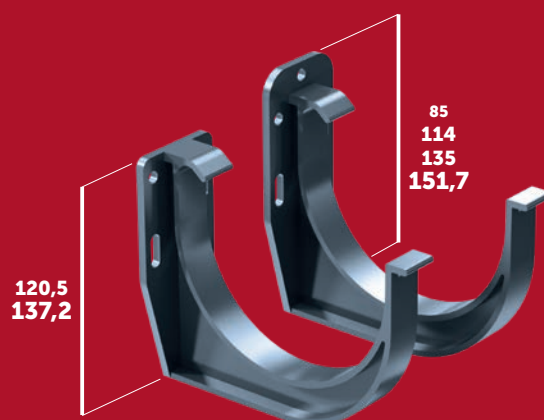



Excellent impermeability.

Triple-lip gasket – designed specifically for ProAqua system is up to 50% more effective than the popular double-lip gasket. Gaskets are used in outlets, connectors, corners and stop ends.



High resistance to external factors.

ProAqua has a high resistance to temperature variations and UV radiation.



Easy and quick installation.

ProAqua is among others:

- downpipe clip with a hinge,
- o-ring protecting the downpipe clip's screw from falling out,
- indicators (arrows) pointing the direction of assembly,
- the possibility to fasten the gutter from the bend or wall side,
- connection to the gutter bracket that creates the lock which prevent the gutter from slipping out after mounting of the system.

This is why the assembly is so easy.



Safe product.

In the process of preparing PVC mixtures for the gutter system, as one of the first in Poland, we used lead-free solutions, as well as environmentally-friendly calcium-zinc stabilizers. This makes the manufacturing and use of our products absolutely safe.



Award-winning project.

Compliant with PN-EN 607, EN 12200-1 standards, ProAqua system won the Golden Medal of International Construction and Architecture Fair BUDMA 2015.



Golden Medal MTP BUDMA 2015
for ProAqua PVC Gutter System



Water stopper.

Water stopper is a special protective feature that not only prevents the water from overflowing - thus protecting the facade from dirt but also stiffens the gutter.



Environmentally friendly solutions.

We used proprietary solutions which save water and energy and minimize waste.

We manufactured it from plastic – polyvinyl chloride (PVC) with additives, which make ProAqua 100% recyclable.



Safe transport and storage.

Each element of the system is factory-protected with foil. We transport it in specially designed packaging and we care about the highest standards of storage and transportation.



For home and industry.

ProAqua is available in three sizes: 75/63 and 125/90 (110) for the individual houses, and 150/110 for the industrial and large buildings.



Piece of mind for years.

ProAqua gutter system comes with 10-year warranty.




Recommended by the roofers.

ProAqua was created together with roofers for roofers. It is a product for each professional.


DIMENSIONS ACCORDING TO SYSTEM SIZE

75
100
125
150v

GUTTER STOP END

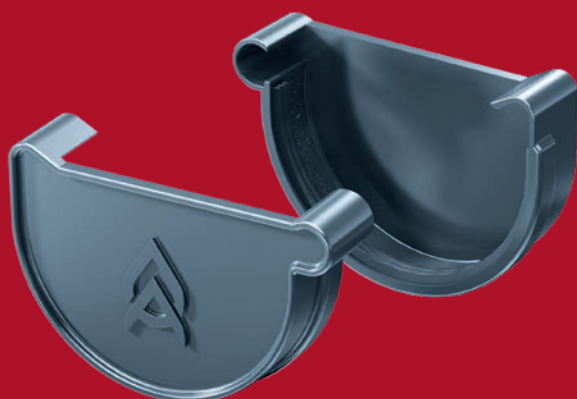


DOWNPIPE DOWNPIPE CLIP

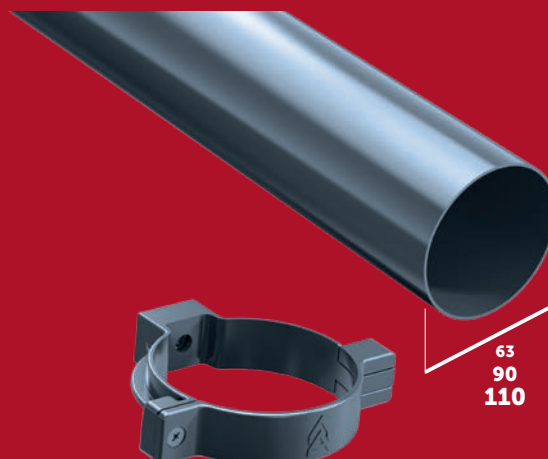


DOWNPIPE CONNECTOR


SINGLE / DOUBLE-SOCKET

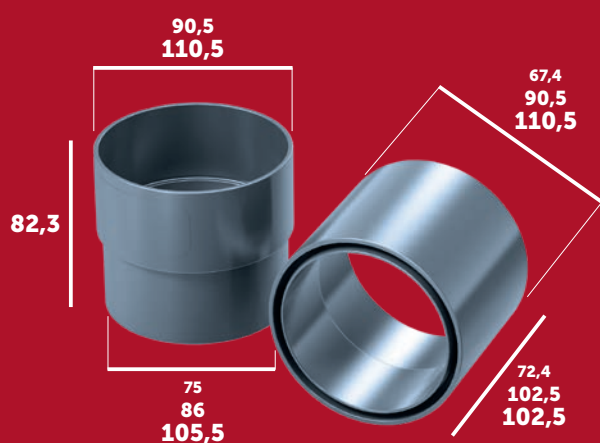


DOWNPIPE BENDS SINGLE / DOUBLE-SOCKET

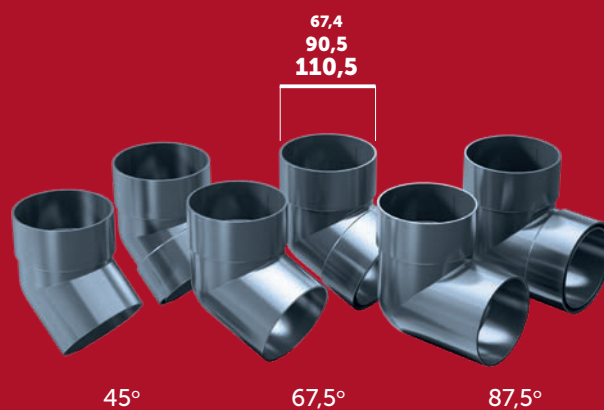


DOWNPIPE BRANCH

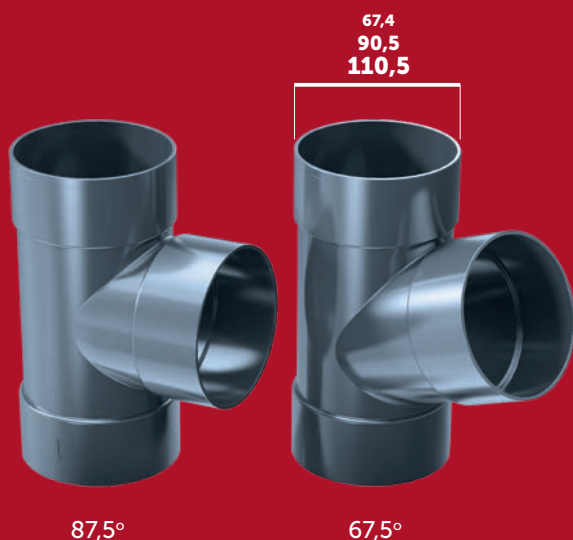

DOWNPIPE SHOE

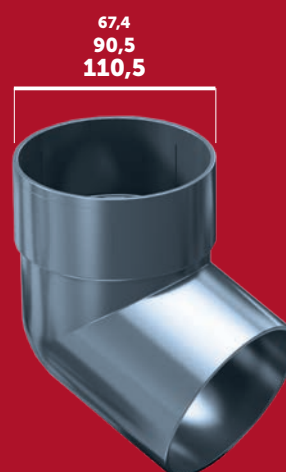

RAIN-THIRSTY.

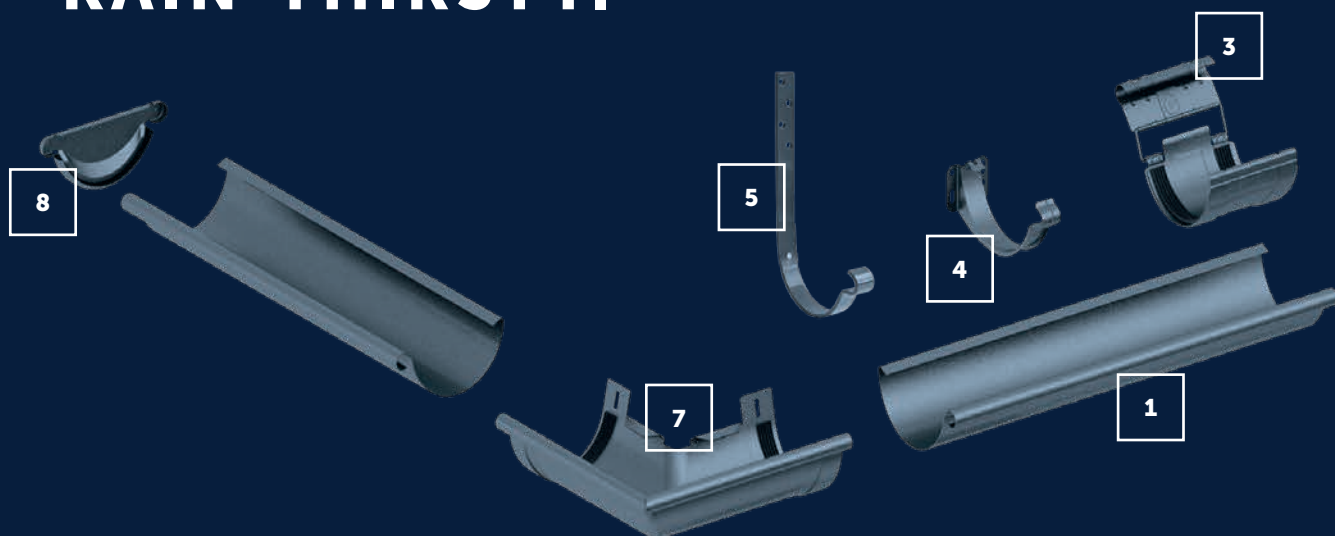

STEEL

SYSTEMS

125/90
125/100

135/90
135/100

150/90
150/100

30
YEAR
WARRANTY

GREENCOAT® RWS
COLORFUL STEEL
by SSAB Swedish Steel

COLORS

Brown ~RAL 8028/8017
GreenCoat RWS 434
125 – 135 – 150

Dark-brown ~RAL 8019
GreenCoat RWS 387
125 – 135 – 150

Graphite ~RAL 7011
GreenCoat RWS 087
125 – 135 – 150

Anthracite ~RAL 7016
GreenCoat RWS 036
125 – 135 – 150

Black ~RAL 9005
GreenCoat RWS 015
125 – 135 – 150

The colours shown are illustrative
and may vary from the actual ones.

Brick-red ~RAL 8004
GreenCoat RWS 742
125 – 150

Silver metallic ~RAL 9006
GreenCoat RWS 045
125 – 150

Anthracite metallic ~RAL 9007
GreenCoat RWS 044
135 – 150

Flamingo
SATIN

Black satin matt
~RAL 9005
GreenCoat RWS Pro BT M015
135

Brown satin matt
~RAL 8028/8017
GreenCoat RWS Pro BT M434
135


Graphite satin matt
~RAL 7016
GreenCoat RWS Pro BT M455
135

40
YEAR
WARRANTY

GREENCOAT®
COLORFUL STEEL
by SSAB Swedish Steel
RWS PRO BT



Flamingo

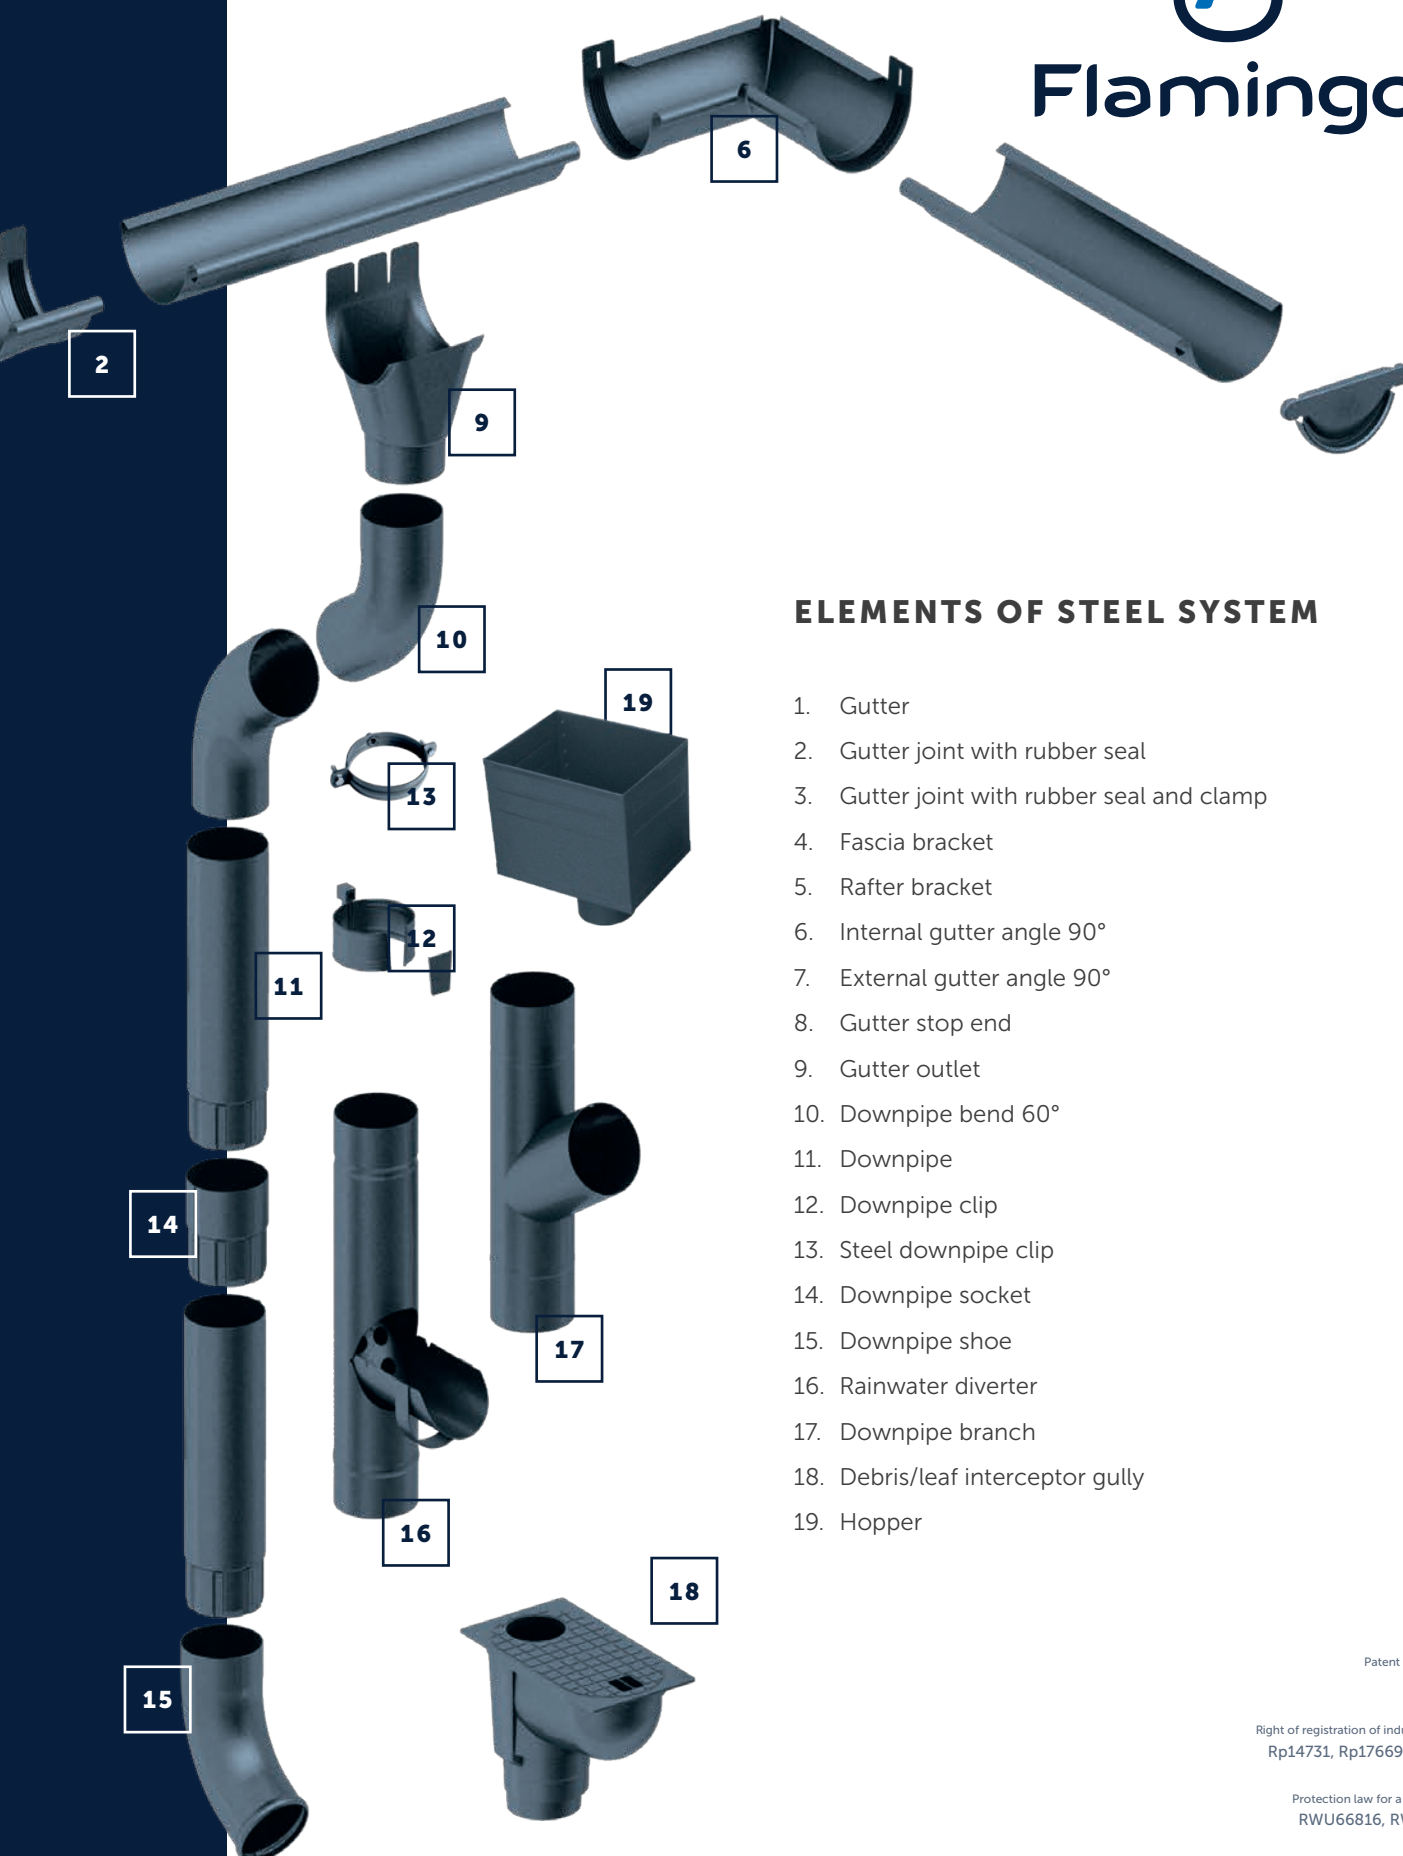

ELEMENTS OF STEEL SYSTEM

1. Gutter
2. Gutter joint with rubber seal
3. Gutter joint with rubber seal and clamp
4. Fascia bracket
5. Rafter bracket
6. Internal gutter angle 90°
7. External gutter angle 90°
8. Gutter stop end
9. Gutter outlet
10. Downpipe bend 60°
11. Downpipe
12. Downpipe clip
13. Steel downpipe clip
14. Downpipe socket
15. Downpipe shoe
16. Rainwater diverter
17. Downpipe branch
18. Debris/leaf interceptor gully
19. Hopper



Patent for invention
217565

Right of registration of industrial design
Rp14731, Rp17669, Rp18757

Protection law for a utility model
RWU66816, RWU68626



Excellent impermeability.

Flamingo elements are moulded in specially designed moulds, and the gutter assembly is so effective that we patented it. Forget about the leaks.



Only the best materials.

Flamingo was manufactured from Green Coat RWS (Rain Water System) steel produced by SSAB – a Swedish global steel concern. GreenCoat RWS was developed specifically to create high quality gutter systems. It has a double sided coating and is exceptionally durable. Coatings used in GreenCoat RWS products include polymer grains, which improve the surface scratch resistance.



Peace of mind for years.

30-year warranty for the C1-C4 environmental class (industrial and coastal areas with a high aggressiveness of the corrosive environment).



For home and industry.

Flamingo is available in three sizes: for home – a Scandinavian system 125/90 (100), a deep system 135/90 (100) and the system for industrial and large buildings – 150/100 (90).



Safe transport and storage.

Flamingo elements were factory-protected with foil. We transport it in specially designed packaging and we care about the highest standards of storage and transport.




Recommended by the Polish Roofers Association.

Flamingo was created together with roofers and for roofers. It is a product for each professional.

DIMENSIONS ACCORDING TO SYSTEM SIZE


125
135
150

GUTTER

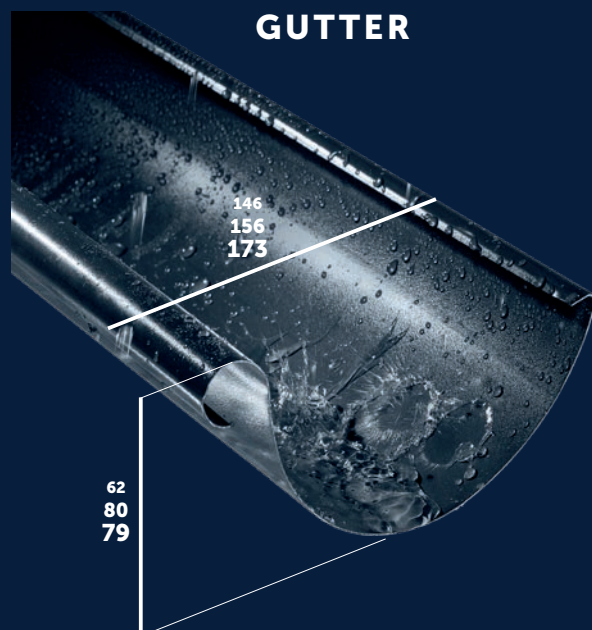

GUTTER JOINT WITH RUBBER SEAL


WITH A CLAMP

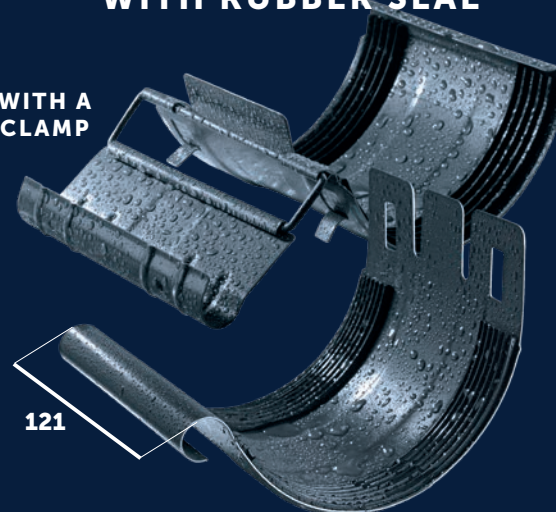


GUTTER OUTLET



INTERNAL GUTTER ANGLE 90°

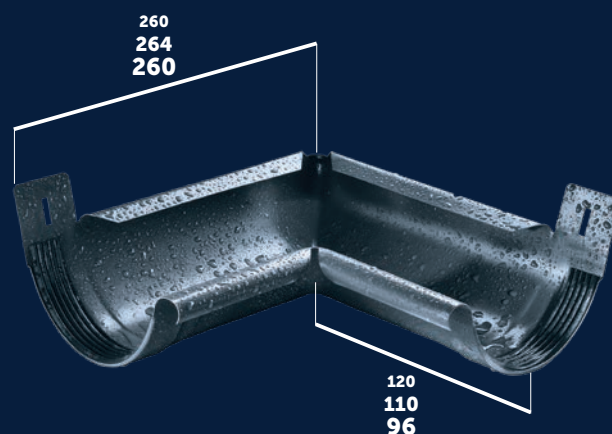

EXTERNAL GUTTER ANGLE 90°

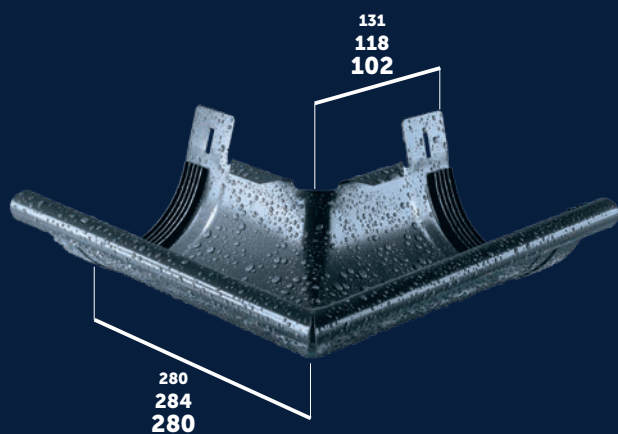

FASCIA BRACKET / RAFTER BRACKET



DIMENSIONS ACCORDING TO SYSTEM SIZE

125
135
150


GUTTER STOP END




DOWNPIPE CLIP




DOWNPIPE SOCKET

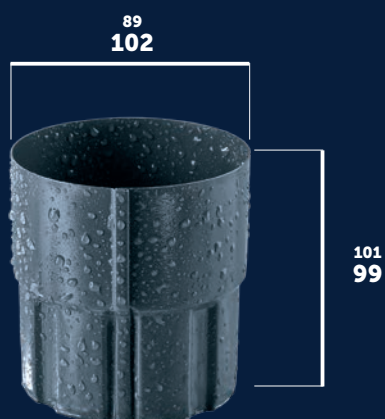


DOWNPIPE BEND

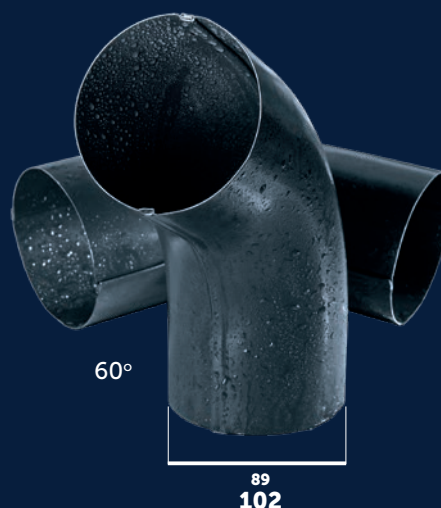

DOWNPIPE BRANCH RAINWATER DIVERTER

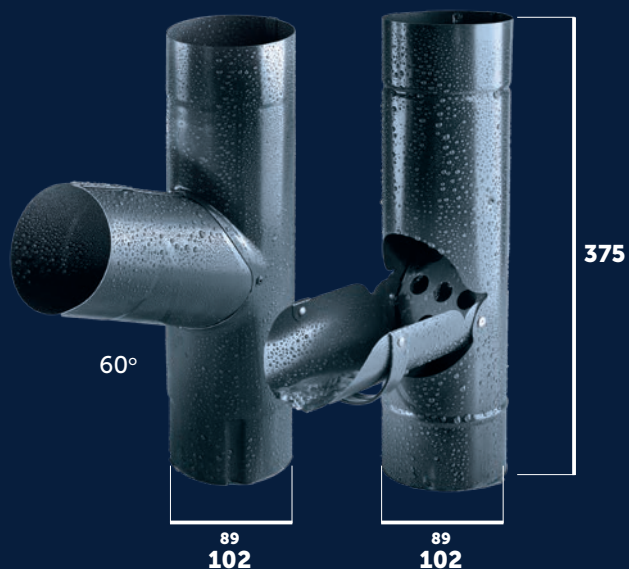

DOWNPIPE SHOE

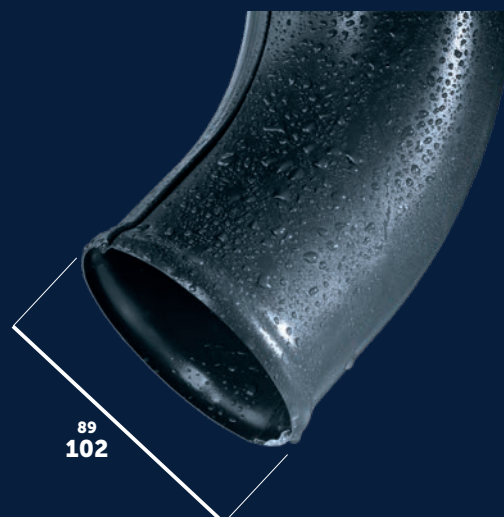



High resistance to external factors.

GreenCoat RWS products are a lightweight construction materials with a beautiful shine. They are very resistant to corrosion, UV radiation and scratches.



Complete steel roof and 50-year warranty.

Flamingo fits perfectly the Budmat Modular Roof Family. By purchasing a Flamingo gutter system with a modular roof, you can extend the modular roof guarantee period up to 50 years.



Easy and quick installation.

If only you had seen our modern machinery parks, you would have found out that Flamingo elements are made with attention to the smallest details and fit each other perfectly. Just like baby blocks. This is why the assembly is so easy.



Extra load capacity of the brackets.

Flamingo has various types of brackets and each of them will easily carry a weight of 75 kg.



275 g/m² – zinc coating in accordance with building standards.

The system is made of the best quality steel covered with zinc coating of minimum 275 g/m².




Reliable system.

Flamingo has been successful for many years. In 2010, it won a Gold Medal at BUDMA Construction and Architecture Fair. This is a system, which is liked and recommended by roofers.




Gold Medal MTP BUDMA 2010 for the Flamingo Steel Gutter System

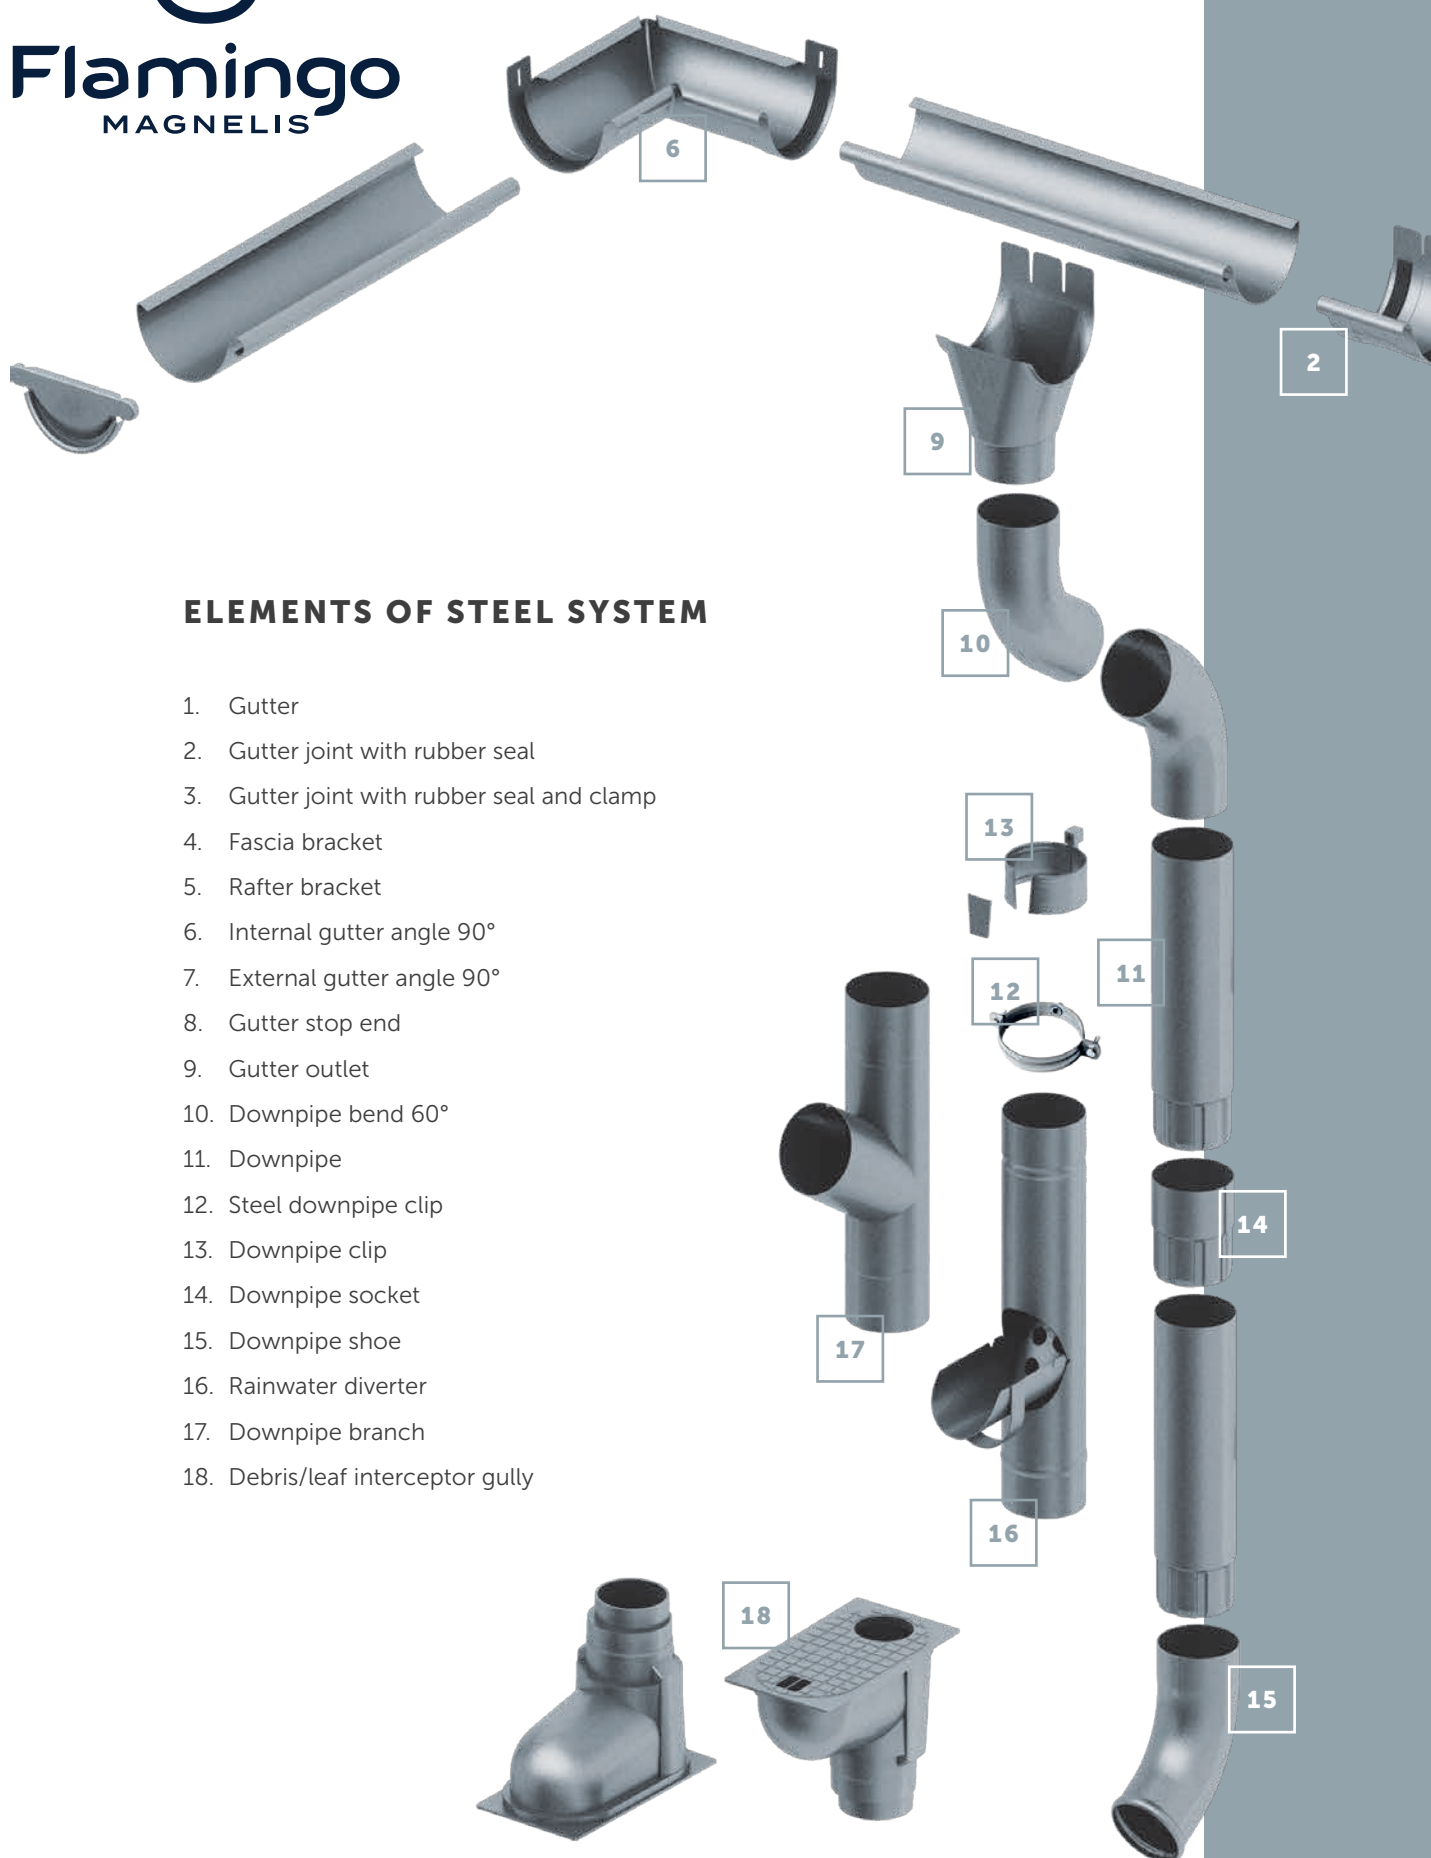

ELEMENTS OF STEEL SYSTEM

1. Gutter
2. Gutter joint with rubber seal
3. Gutter joint with rubber seal and clamp
4. Fascia bracket
5. Rafter bracket
6. Internal gutter angle 90°
7. External gutter angle 90°
8. Gutter stop end
9. Gutter outlet
10. Downpipe bend 60°
11. Downpipe
12. Steel downpipe clip
13. Downpipe clip
14. Downpipe socket
15. Downpipe shoe
16. Rainwater diverter
17. Downpipe branch
18. Debris/leaf interceptor gully

FOR C-5 ENVIRONMENT.

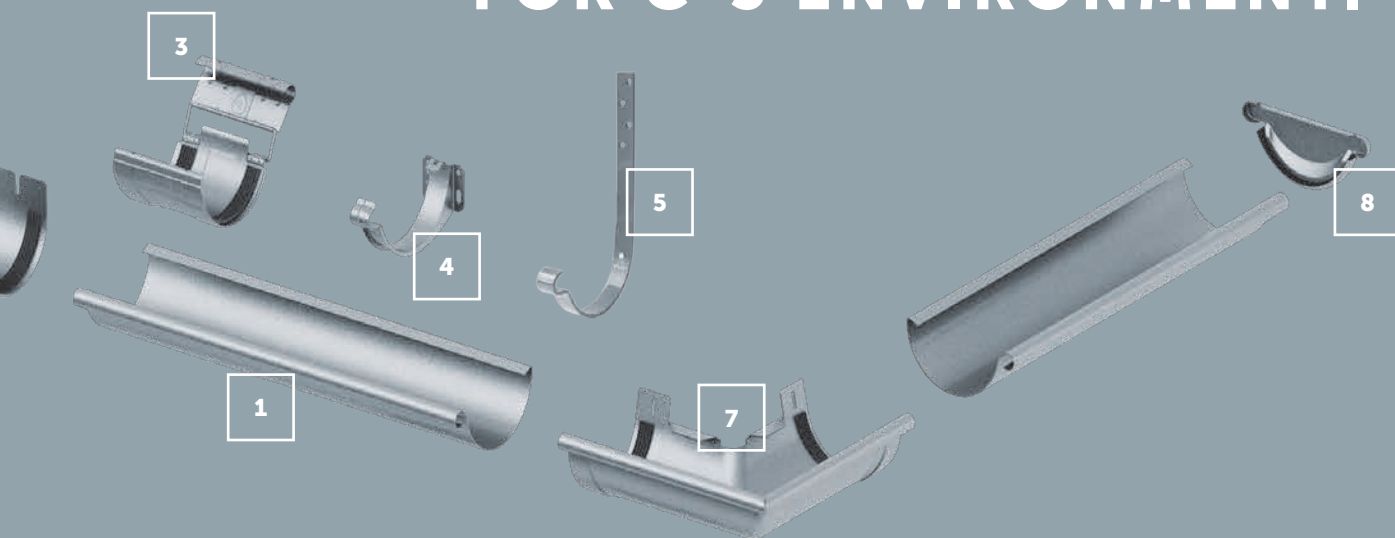

STEEL

SYSTEMS

125/90
125/100

135/90
135/100

150/90
150/100

COLOR




Magnelis
Natural dark-grey
(patinating effect)
125 – 135 – 150

The colour shown is illustrative
and may differ from the actual one.

10
YEAR
WARRANTY

Magnelis®


ArcelorMittal

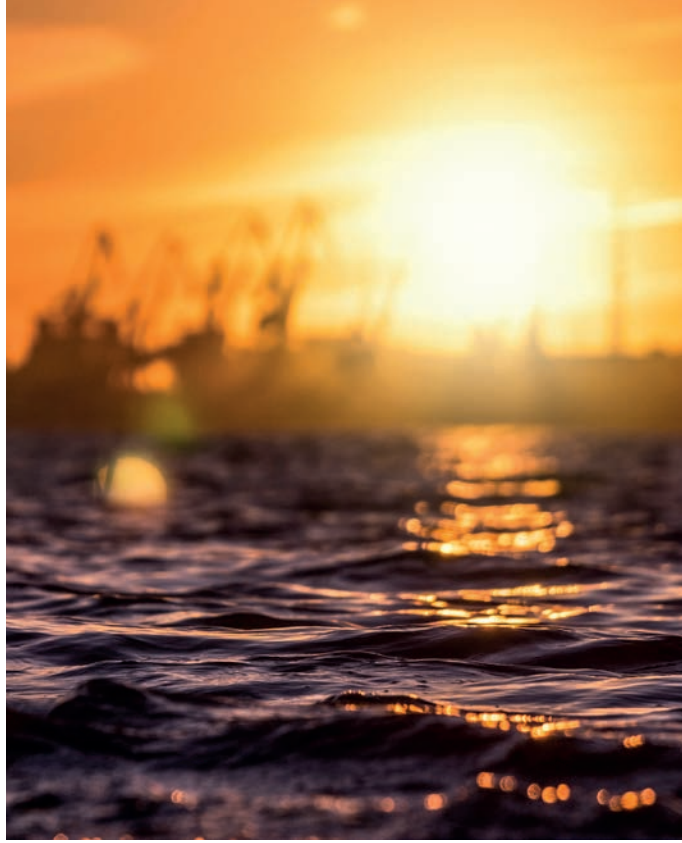

10-year warranty in C-5 environment.

Ideal for industrial buildings and areas of high salinity. Flamingo Magnelis has 10-year warranty in C-5 environment.



Only the best materials.

We manufactured Flamingo Magnelis from Magnelis ZM 310 steel sheet manufactured by the largest producer in the world – ArcelorMittal. Magnelis is a unique metallic coating consisting of 93.5% zinc, 3.5% aluminium and 3% magnesium.



Excellent resistance to corrosion.

Flamingo Magnelis provides up to ten times better corrosion protection than standard hot-dip galvanized steel. This is due to the admixture of 3% magnesium. It forms a stable and strong coating on the entire surface of the sheet and provides more effective corrosion protection than the coating with lower magnesium content.



Extra load capacity of the brackets.

Flamingo Magnelis has brackets that easily hold a weight of 75 kg.





Flamingo
MAGNELIS

FOR
ENVIRONMENT
C-5



GUTTER SYSTEMS



Proaqua



Flamingo



Flamingo
MAGNELIS



Flamingo
SATIN

budmat.com